

DH-NVR1104/1108-P

4/8CH Smart 1U 4PoE Network Video Recorder



Features

- > Up to 4/8 channel IP camera input
- > H.264/MJPEG dual codec decoding
- > Max 56Mbps incoming bandwidth
- > HDMI/VGA simultaneous video output
- > All channel synchronous realtime playback, GRID interface
- > Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek and etc.
- > ONVIF Version 2.3 conformance
- > 3D intelligent positioning with Dahua PTZ camera
- > Support 1 SATA HDD up to 4TB, 2 USB2.0
- > Multiple network monitoring: Web viewer, CMS(DSS/Smart PSS) & Smart Phone(DMSS)
- > Support IPC UPnP, 4PoE ports
- > Support P2P, QR code
- > Black or white case (optional)

DH-NVR1104/1108-P


Technical Specifications

Model	DH-NVR1104-P		DH-NVR1108-P	
System				
Main Processor	Dual-core embedded processor			
Operating System	Embedded LINUX			
Video & Audio				
IP Camera Input	4 channel		8 channel	
Two-way Talk	1 channel Input,1 channel Output, RCA			
Display				
Interface	1 HDMI, 1 VGA			
Resolution	1920×1080, 1280×1024, 1280×720, 1024×768			
Display Split	1/4		1/4/8/9	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording			
Recording				
Compression	H.264/MJPEG			
Resolution	1080P(1920×1080)/720P(1280×720)/D1 (704×576/704×480) & etc.			
Record Rate	Max 56Mbps			
Bit Rate	48~8192kbps			
Record Mode	Manual, Schedule(Regular(Continuous), MD), Stop			
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec			
Video Detection				
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips			
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank			
Playback & Backup				
Sync Playback	1/4		1/4/8	
Search Mode	Time/Date, MD & Exact search (accurate to second), Smart search			
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom			
Backup Mode	USB Device/Network/Internal SATA burner			
Network				
Ethernet	1RJ-45 port (10/100Mbps)			
PoE	4 ports (IEEE802.3af/at)			
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Search(Support Dahua IP camera, DVR, NVS and etc.),SNMP, P2P			
Max User Access	128 users			
Smart Phone	iPhone, iPad, Android			
Storage				
Internal HDD	1 SATA port, up to 4TB			

DH-NVR1104/1108-P

Auxiliary Interface	
USB	2 ports (2 Rear), USB2.0
General	
Power Supply	Single, DC48V/1.25A
Power Consumption	NVR: 10W (without HDD)
	PoE: Max 25.5W (Single port)
Working Environment	-10°C~+55°C/10%~90%RH/86~106kpa
Dimension (W×D×H)	Smart 1U, 205mm×205mm×45mm
Weight	500g (without HDD)

System Connection

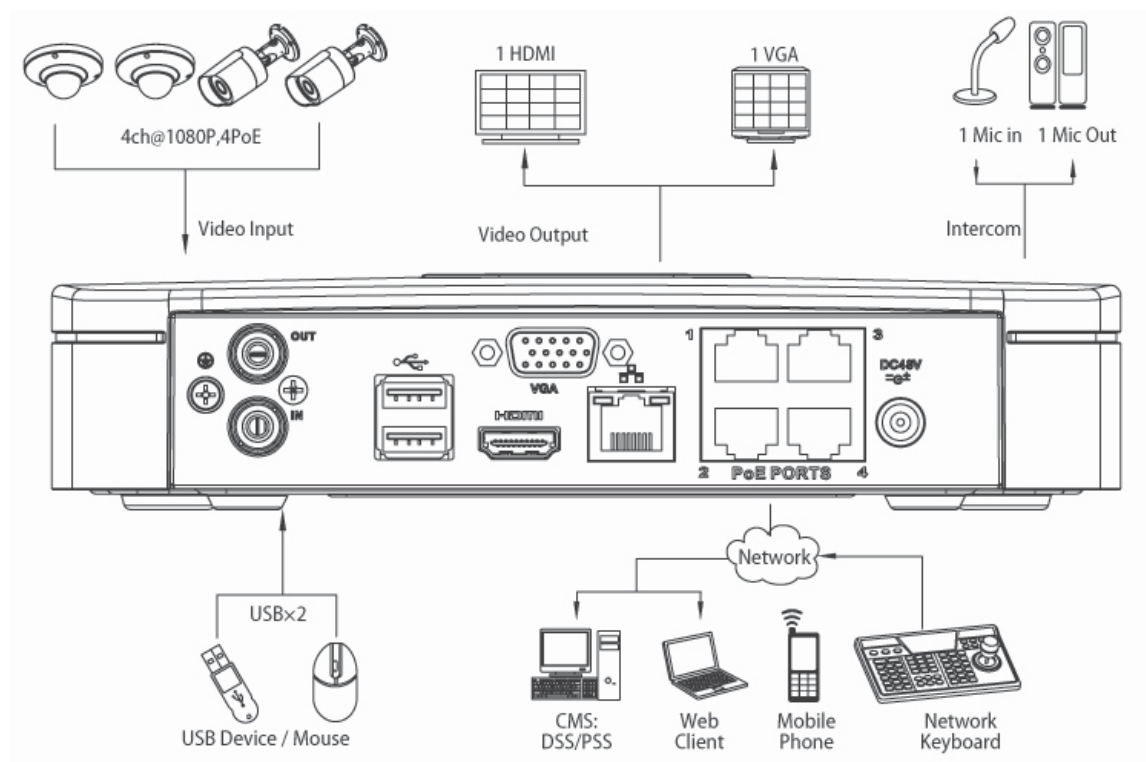

*Takes NVR1104-P as an example

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 ahua Technology Co., Ltd.